


# IrDA<sup>®</sup> - USB PRINTER ADAPTER


## ACT-IR100MU

Links up your printer with IrDA<sup>®</sup> enabled mobile devices wirelessly; **ACT-IR100MU** is an IrDA USB Printer Adapter. It gives you mobile freedom and instant access to your USB printers wirelessly. Simply connect **ACT-IR100MU** to your printer through USB for a Plug and Play experience. ACT-IR100MU is great for home and office use, freeing you from cables and wires.

- ❖ Simply attach to a printer using USB port and gives printing from the IrDA enabled devices.
- ❖ Supports all SIR speeds (9.6k, 19.2k, 38.4k, 57.6k and 115.2k bps). Compatible with most IrDA devices with IrLPT<sup>™</sup> protocol such as notebook PC, Cellphone, Modem, Instruments, Data Terminals, Digital Camera, Image Capture Devices and others.
- ❖ Easy to use and no driver is required.
- ❖ True PnP (Plug And Play) and hot insertion capability!
- ❖ Compliant with USB 1.1 specification (HOST) and IrDA (IrLPT 1.4) specification.
- ❖ Low power consumption.
- ❖ Compact size.
- ❖ Obtains power from AC power adapter: 7.5 V DC 300 mA; power jack pin 1.3 mm dia; Inside positive Ve polarity

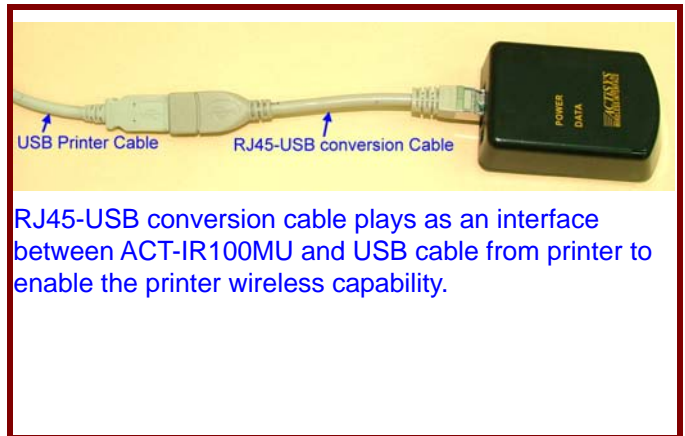

RJ45-USB conversion cable plays as an interface between ACT-IR100MU and USB cable from printer to enable the printer wireless capability.

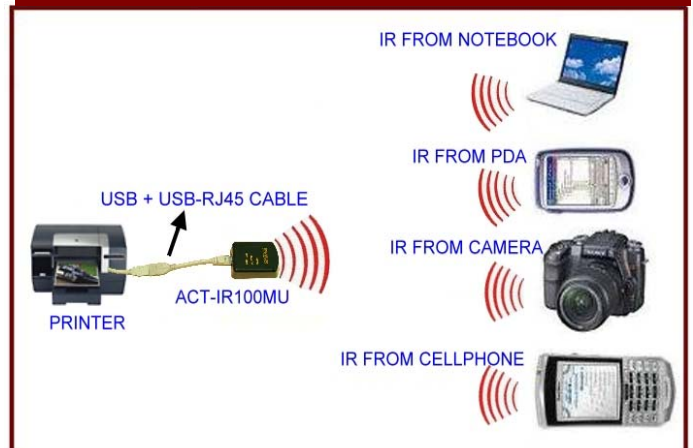

ACT-IR100MU

The only IrDA<sup>®</sup> adapter supplier that has test tools to help your system to be IrDA<sup>®</sup> compliant !



# IrDA<sup>®</sup> - USB PRINTER ADAPTER

## ACT-IR100MU

### Specifications

#### ❖ **Compatibility**

Fully compliant with USB 1.1 specification and IrDA<sup>®</sup> (IrLPT<sup>™</sup> 1.4) specification

#### ❖ **Communication Speed and Distance:**

9.6k, 19.2k, 38.4k, 57.6k, 115.2k bps; 1 cm ~158 cm

#### ❖ **Power Source**

Obtains power from AC power adapter, 7.5 V DC 300 mA

#### ❖ **Power Consumption:**

Active current: < 60 mA, Standby current: < 1.7 mA

#### ❖ **Dimension / Weight:**

8 cm (3.1") L X 5 cm (2.0") W X 3 cm (1.2") H / 48.3 g (1.7 oz)

#### ❖ **Operating / Storage Temperature:**

0° C to +60° C / -20° C to +85° C

#### ❖ **Compatible Printers:**

**Compac** IJ1200; **Cannon** iP100(pixma); **EPSON** STYLUS CX5100, STYLUS Photo RX650 Series, PictureMate Dash PM260; **HP**:DeskJet350, 3820, 6988, LaserJet2300, 4240n, P2055dn OfficeJet H470, J4580, Photosmart InkJet 2610, Business InkJet 8000 CB092A; **Kyocera** FS-1030D; **LexMark** x2470, x642, x646e, E120n, T632; **Okidata** B2400; **Samsung** ML-2250, ML-2550, ML-3560

The only IrDA<sup>®</sup> adapter supplier that has test tools to help your system to be IrDA<sup>®</sup> compliant !

#### **ACTiSYS Corporation**

921 Corporate Way  
Fremont, CA 94539-6118, U.S.A.  
Tel: +1-510-490-8024  
Fax: +1-510-623-7268  
E-mail: [irda-info@actisys.com](mailto:irda-info@actisys.com)  
Web Site: <http://www.actisys.com>

All trademarks, logos, organization & company names and product model names are the properties of the respective organizations or companies.